


WAG/Cer/- **WAVEGUARD**



Bladder-less , Foam-less , No Moving parts

Fit and forget - service free DAMPERS With Ceramics. Licensed W. Packer '63

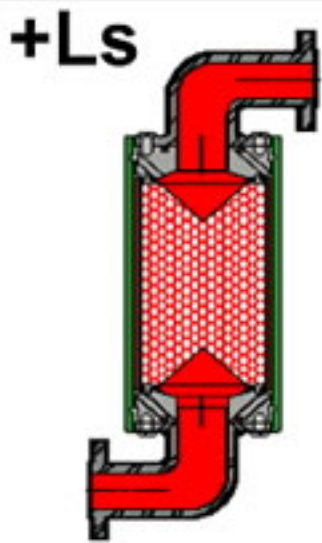

"L.D.I"
Liquid Dynamics
International Ltd.
DUAL CERTIFICATION

CE 0040
Dampers I.A.W. P.E.D.97/23/
EC 3.3 are "SEP" to PD 5500


P.E.R.: 1999 SI 2001 Cat. I have mark.
P.E.R.: 1999 SI 2001 Cat. II, III, IV
also have the mark above.

P.E.D. = Pressure Equipment Directive
P.E.R. = Pressure Equipment Regulations
S.I. = Statutory Instrument
SEP Standard Engineering Practice
CE Community European

ISO
9001-1994 Cert95-LON-AQ-458
QSC 97028
Design & Manufacture Pressure Vessels
9001-2000 RSA -

**NO
MOVING
PARTS**

**NO GAS
PREFILL**

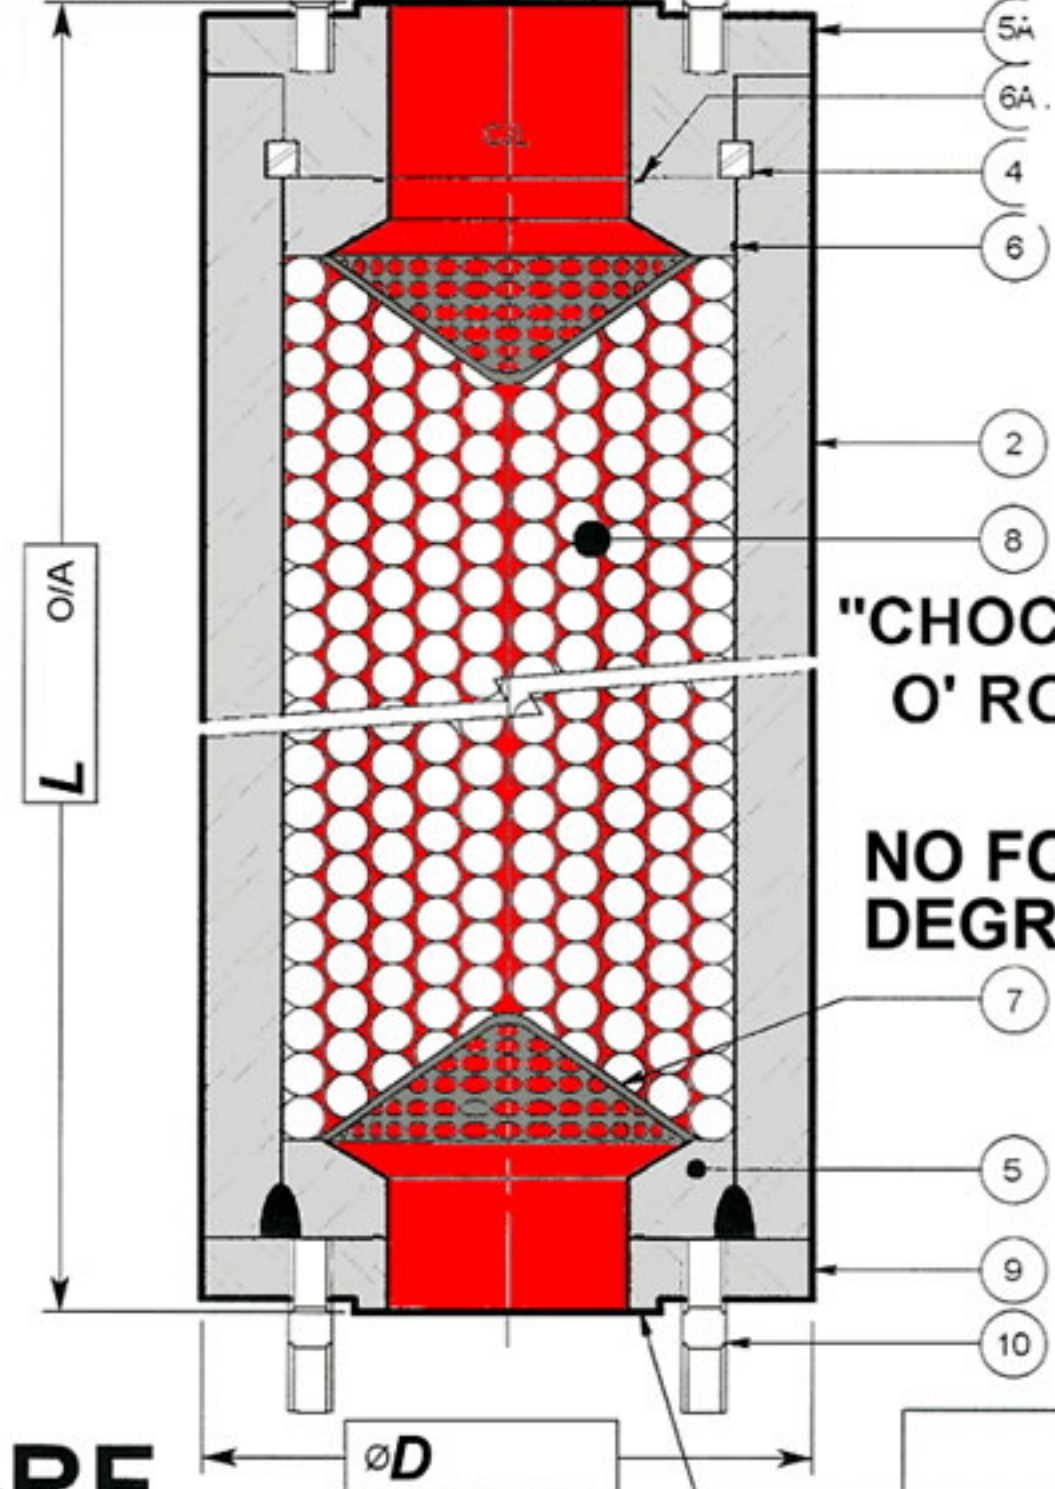


**"CHOCK FULL
O' ROCKS"**


**NO FOAM TO
DEGRADE**

ANSI B16.5/DIN

-RF

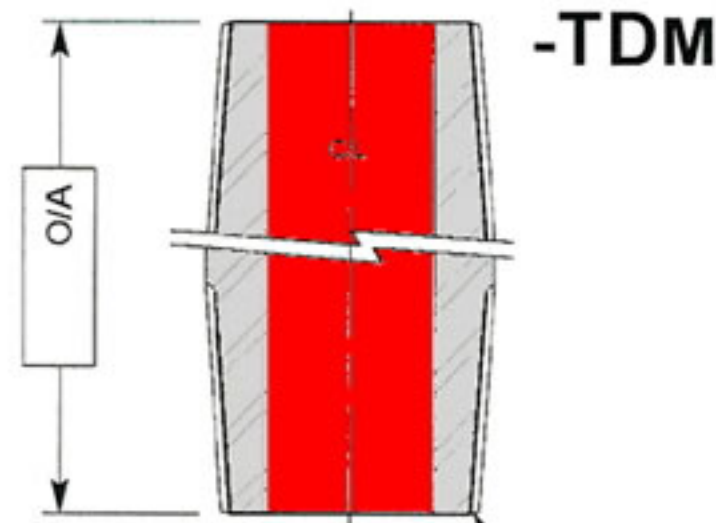

THREAD MALE

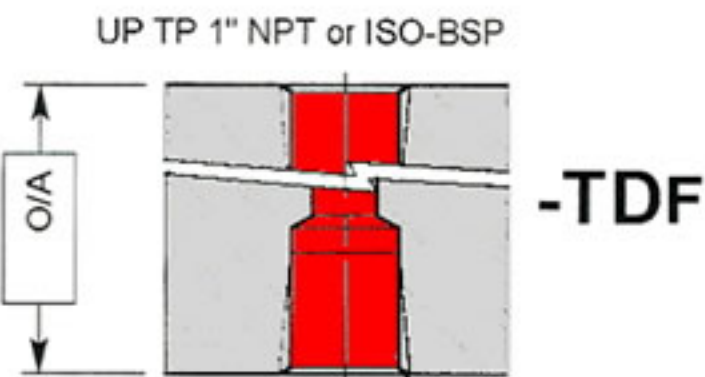

THREAD FEMALE
"NON-PREFERRED" ITEM

UP TP 1" NPT or ISO-BSP

| Item | Part No. | Description | Material | I.D. # | CUSTOMER: |
|------|----------|------------------------|----------------|--------|------------------|
| 2 | | Body | | | CUSTOMER REF.: |
| 4 | | Tamper-Proof Lock-Ring | | | QUANTITY: |
| 5 | | End-Closure (WE) | | | W/O No.: |
| 5A | | End-Closure (Std) | | | WEIGHT (EST.): |
| 6 | | Seal - Diametral | | | W: |
| 6A | | Seal - Face | | | ISSUED BY: |
| 7 | | Perforated Cone | | | CHECKED BY: |
| 8 | | HF Balls | Ceramic + GTFE | | (DAY/MONTH/YEAR) |
| 9 | | Tamper-Proof Lock-Ring | | | ISSUE DATE: |
| 10 | | Tamper-Proof Lock-Ring | | | |



ISO 9001 - 95-LON-AQ-458
www.pulseguard.co.uk
PO Box 47 Stockport
SK5 7BB Ches. UK

CE 0040 SS0210435
www.pulseguard.com
Box 506 Hampstead
NC 28443-9110 USA
-01-910-270-2737
Fax: -01-910-270-2740

TITLE: **PULSATION DE-COUPLER/
INTERCEPTOR**

APPLICATION:
**Prevent System Response Pulsations
from Amplifying and Resonating with
the Forcing Action.**

FILE REF: STD00WAG.VLM/03-FEB-00

SCALE: NTS ALL DIMENSIONS ARE IN
MM EXCEPT AS STATED

VIEW NO.
WaG/Cer/

SHEET: 1 OF 1 REV. 0

