


Flex Orber /LP 2.1 Liter / 103 Bar with connections By PulseGuard

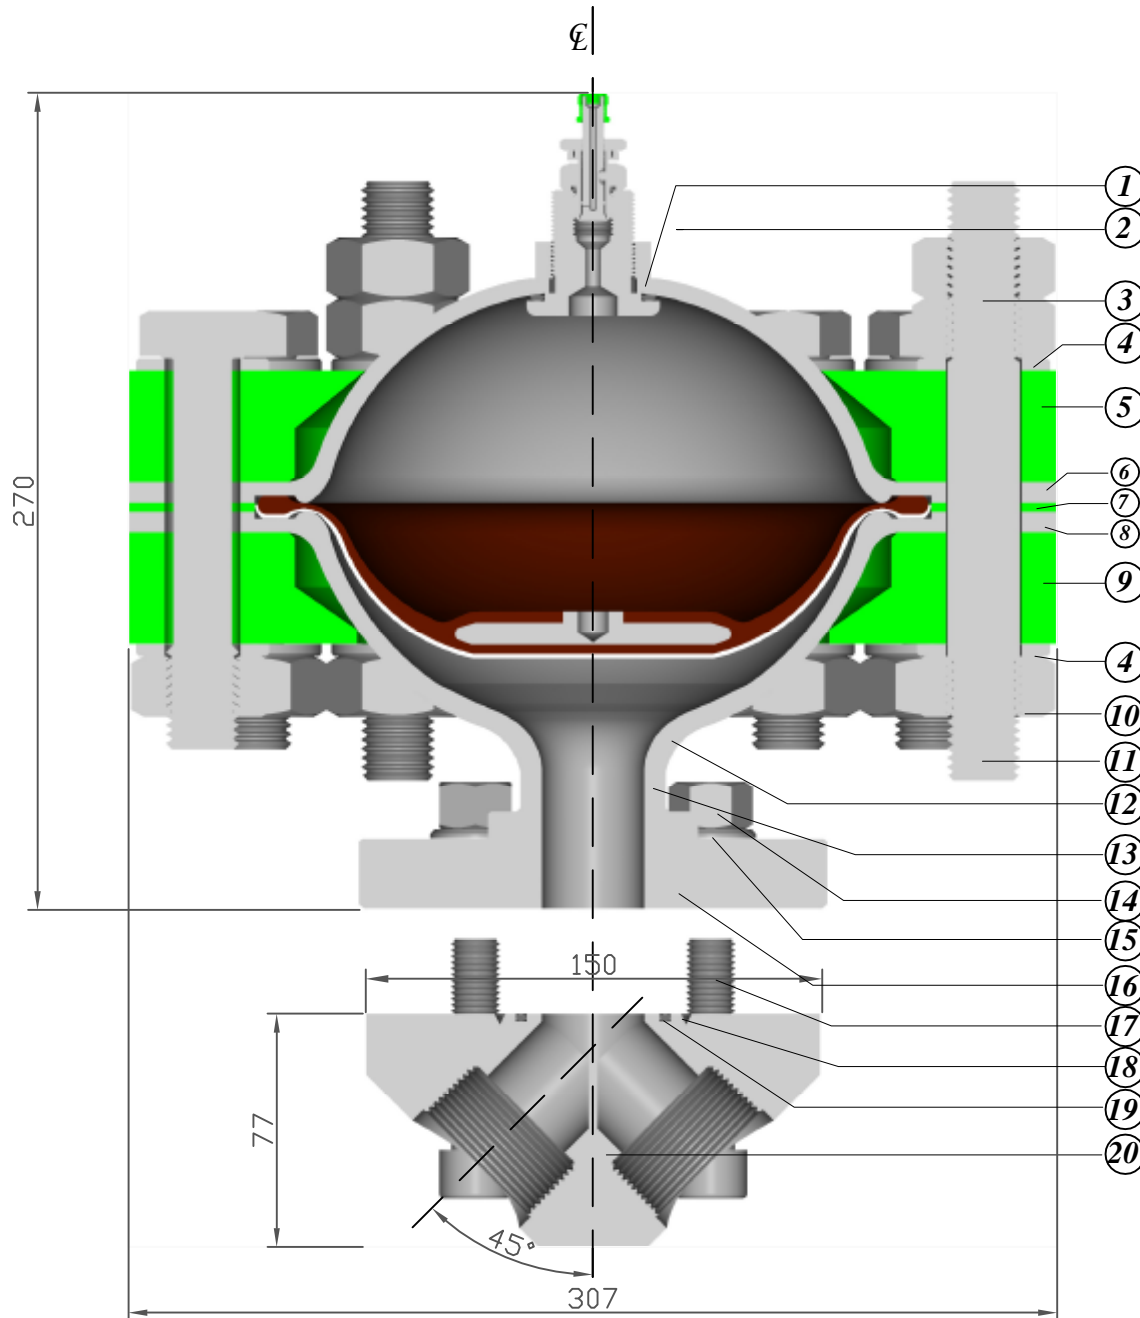

20	Piping base block, up to 4 ports
19	Face "O" seal
18	Pressure relief escape groove
17	Socket head bolting, 4 equi-spaced
16	Max connection OD to pass between A-A, 150mm or 6"
15	5/8" flat washers. Can be 4 by 5/8" socket head bolts or 4.33" PCD
14	Nuts for 4 by 5/8" socket heads on 4.33" PCD
13	1 1/2" Schedule 160 pipe nozzle. ANSI flange 1 1/2" 600# 6.1" OD
12	Flared transition, 1 1/2" sch 160 to 4mm head, hole reinforcement
11	3 places - All-thread on same Pitch Circle Diameter as boltings
10	Nuts, 1 for each bolt, 3 per all-thread, provides 1 for mounting
9	Support ring - liquid side. Contact outside the bolt circle
8	Spaser ring. Contact outside bolt circle
7	Flanged dishing, liquid side. Contact outside bolt circle
6	Flange of dishing, contact outside bolt circle
5	Support ring - gas side, steel
4	Large flat washers
3	Bolts 9 places, Mounting, long "all-threads" 3 places
2	N2 Side, Hydro-forged head w/28mm aperture
1	Nitrogen Side, Hydro-forged head w/prefill boss

Item Nbr	Description/function
----------	----------------------

Scale 2.5:1 please do not print without "Maintain aspect ratio" on. Use A4 paper Landscape 297mm wide
 Part nbr./Drawing Ref: Date Sep 15th 2006 Rev Nbr
 SoG/ss/130/1500p/316L-PRE+PB/1 1/2"x1 1/2" F NPT/316L

PulseGuard <http://www.PulseGuard.com>
<http://www.PulseGuard.co.uk>

PulseGuard für Deutschland www.pulsationdaempfer.com
PulseGuard, de langue Francaise amortisseurs-des-pulsations.com
PulseGuard, en Espanol/ sud Amerique amortiguador-de-pulsaciones.com
PulseGuard, для Русскоговорящих pulsations-dampfer.com

PulseGuard is the USA registered trade mark of Pulseguard Inc.
 PulseGuard is the UK registered trade mark of Pulseguard Ltd.